




### Assembly

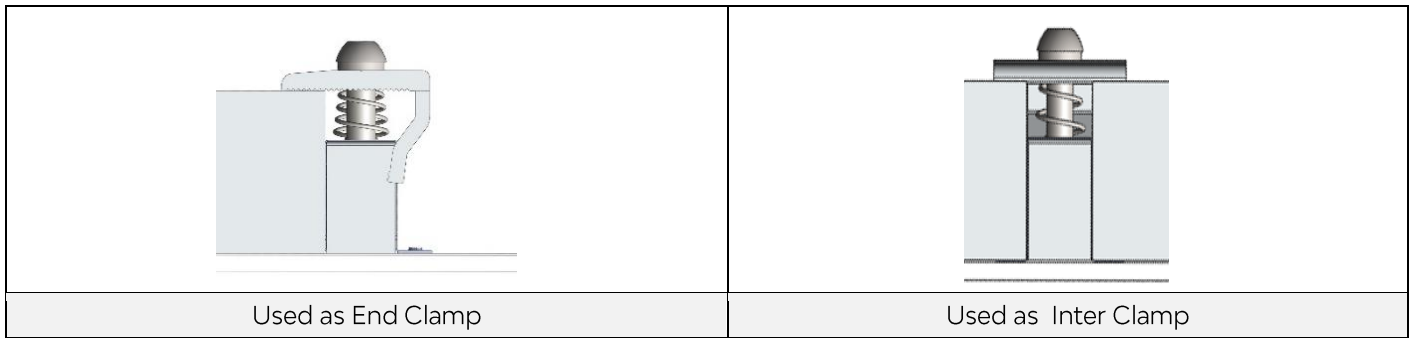

### Component

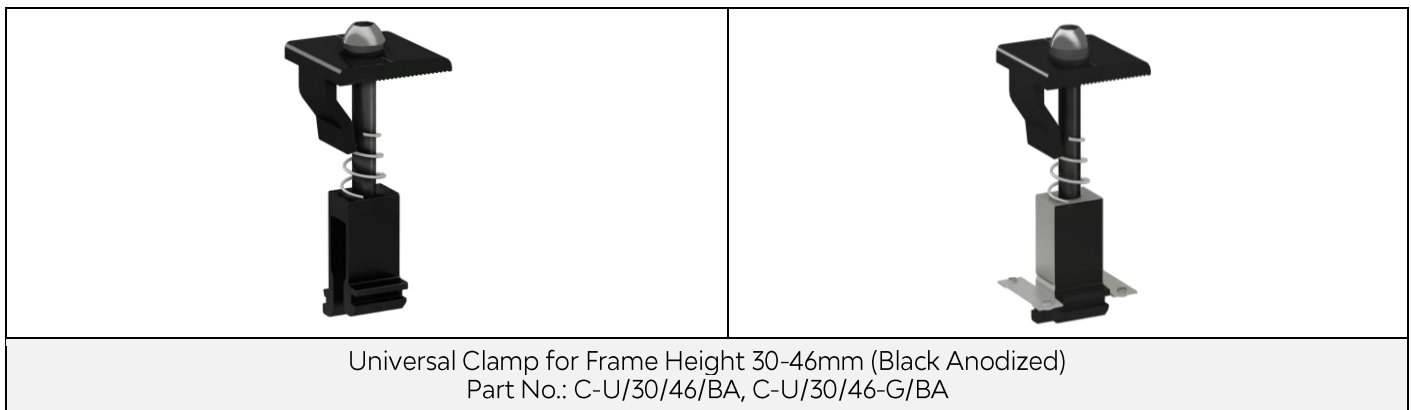

### Technical Specification
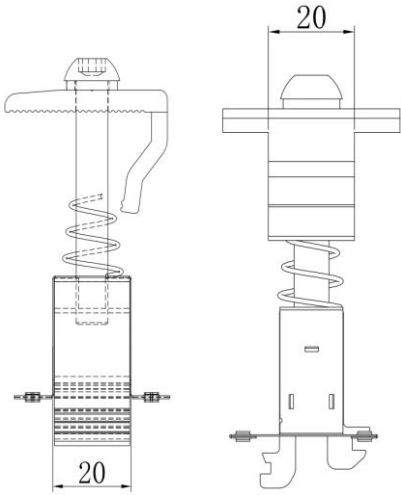
<b>Application</b>	C-U/30/46/BA and C-U/30/46-G/BA are for framed PV Modules of 30-46mm in height	
<b>Requirement</b>	C-U/30/46/BA and C-U/30/46-G/BA need 20mm space on each side of the Rail, need 20mm space between PV Modules	
<b>Recommended Torque</b>	End Clamp: 13-14N•m Inter Clamp: 18-20N•m	
<b>Weight</b>	C-U/30/46/BA: 0.068 kg C-U/30/46-G/BA: 0.072 Kg	
<b>Packaging</b>	30 units per pack, 4 packs (120 units) per carton	
<b>Material</b>	Main parts: AL6005-T5 Fasteners and Grounding Clip: SUS 304	
<b>Color</b>	Black (full anodized, no less than 10 μm)	
<b>Standard</b>	GB50797   AS NZS1170.2-2011   EN1991   JISC8955   ASCE 7-10	