

Mono Black

LG250S1K-G3 / LG245S1K-G3



LG Electronics, Inc. (Korea Exchange: 06657.KS) is one of the globally leading companies and technology innovator for electronics, information and communication products. LG Electronics currently employs more than 91.000 people worldwide in 117 companies. In fiscal year 2011 a turnover of 48,97 billion USD has been achieved.

LG is one of the world's largest manufacturers of mobile phones, flat screen TVs, air conditioners, washing machines and refrigerators. As a futureoriented company, LG relies on the technology of renewable energies and is expanding it. The entire range of high quality solar products are being manufactured in LG's leading production site Korea.













The LG Mark of Excellence

Customers rest assured of cutting-edge technology and reliability when they see the LG logo on every module. The LG logo reflects the high standards that have guided LG for more than 50 years.



Reliable Warranties

LG stands by its products with the strength of a global corporation and sterling warranty policies. Together with a 10 year product warranty a 25 year linear performance warranty is offered.



100% EL Test Completed

All LG modules are tested at various stages of the production by Electroluminescence inspection. The EL inspection detects cracks unseen by the naked eye.



Positive Power Tolerance

LG provides rigorous quality testing to solar modules to assure customers of the stated power outputs of all modules, with a positive nominal tolerance starting at 0%.



Light and Robust

With a weight of just 16.8 kg, LG modules are proven to demonstrate outstanding durability against external pressure up to 5400 Pa.



Convenient Installation

LG modules are carefully designed to help installers benefit from quick and easy installations throughout carrying, grounding, and connecting stages of modules



LG250S1K-G3 / LG245S1K-G3

Mechanical Properties

| Cells | 6 x 10 | |
|------------------------|----------------------------|--|
| Cell vendor | LG | |
| Cell type | Monocrystalline | |
| Cell dimensions | 156 x 156 mm² | |
| Cell busbars | 3 | |
| Front cover | Glass | |
| Dimensions (L × W × H) | 1640 x 1000 x 35 (mm) | |
| Static load | 5400 Pa (snow) | |
| | 2400 Pa (wind) | |
| Weight | 16.8 ± 0.5 kg | |
| Connector type | MC4, IP 67 | |
| Junction box | IP 67 with 3 bypass diodes | |
| Length of cables | 2 x 1000 mm | |
| Frame | Anodized aluminum | |

🗖 Certifications and Warranty

| Certifications | IEC 61215, IEC 61730-1/-2, | |
|--|---------------------------------------|--|
| | IEC 61701, UL 1703, OHSAS 18001, | |
| | ISO 9001, ISO 14001, | |
| | DLG-FokusTest Ammonia Resistance | |
| Product warranty | 10 years | |
| Output warranty of Pmax (Measurement Tolerance ± 3%) | 25 years linear warranty ¹ | |

¹ 1st year: 97%, 2nd - 25th year: -0,7%/a, 25th year: 80,2%

Temperature Coefficients

| NOCT | 47.0 ± 2 °C | |
|------|-------------|--|
| Pmpp | -0.445 %/K | |
| Voc | -0.325 %/K | |
| Isc | 0.050 %/K | |

Electrical Properties (STC²)


| | LG250S1K-G3 | LG245S1K-G3 | |
|--------------------------------|-------------|-------------|--|
| Maximum power Pmax (W) | 250 | 245 | |
| MPP voltage Vmpp (V) | 30.8 | 30.6 | |
| MPP current Impp (A) | 8.13 | 8.02 | |
| Open circuit voltage Voc (V) | 38.3 | 38.1 | |
| Short circuit current Isc (A) | 8.62 | 8.52 | |
| Module efficiency (%) | 15.2 | 14.9 | |
| Operating temperature (°C) | | -40 ~ +90 | |
| Maximum system voltage (V) | 1000 | | |
| Maximum series fuse rating (A) | 15 | | |
| Power tolerance (%) | 0 ~ +3 | | |


² STC (Standard Test Condition): Irradiance 1000 W/m², module temperature 25 °C, AM 1.5 Application Class: A (according to IEC 61730), Safety Class: II

Electrical Properties (NOCT³)


| | LG250S1K-G3 | LG245S1K-G3 |
|--|-------------|-------------|
| Maximum power Pmax (W) | 183 | 179 |
| MPP voltage Vmpp (V) | 27.7 | 27.6 |
| MPP current Impp (A) | 6.58 | 6.49 |
| Open circuit voltage Voc (V) | 35.2 | 35.1 |
| Short circuit current Isc (A) | 6.97 | 6.89 |
| Efficiency reduction (from 1000 W/m² to 200 W/m²) | < 4.5 % | |

³ NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m/s

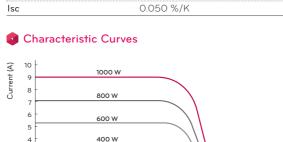

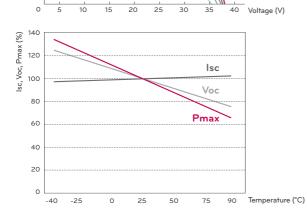

200 W

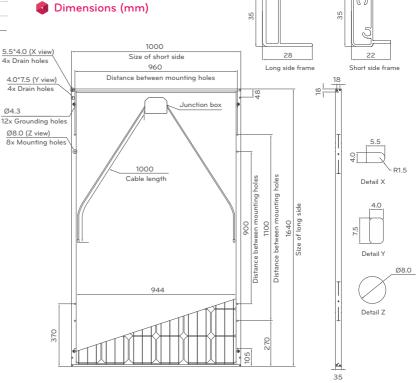



LG Electronics Deutschland GmbH EU Solar Business Group Berliner Straße 93 40880 Ratingen, Germany Email: solar@lge.de

www.lg.com/uk/solar

Subject to change without notice. Status: 02/2013 Document: DS-S1K-G3-EN-201302



All specifications of this data sheet comply with DIN EN 50380.

The distance is between the center of the mounting/grounding wholes.

The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.