




S-5-A Mini

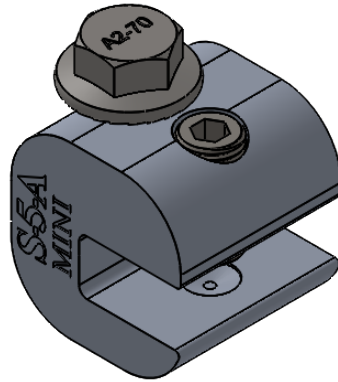

3/8-24 Threaded Hole

Top

M8-1.25 Threaded Hole




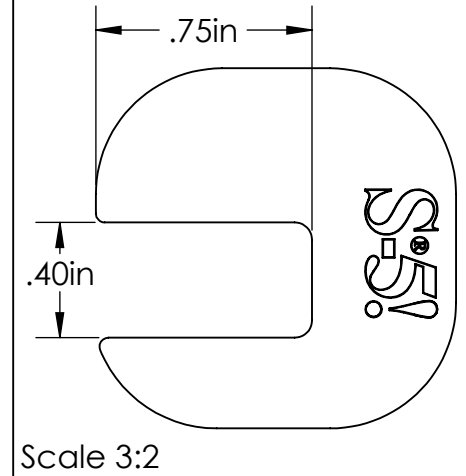
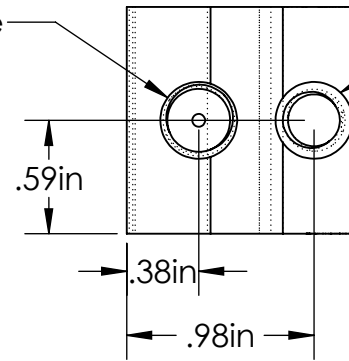


Back

Left

Front

Right

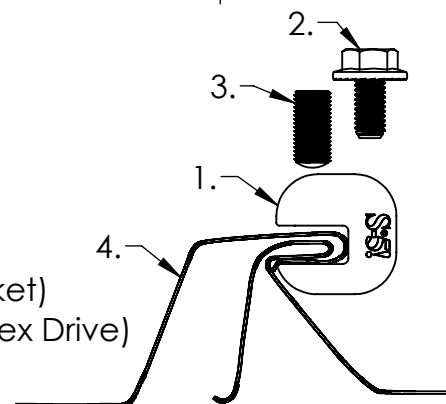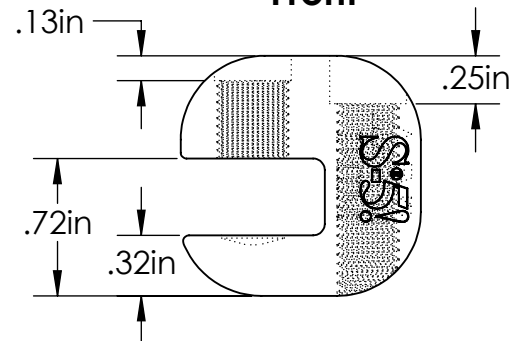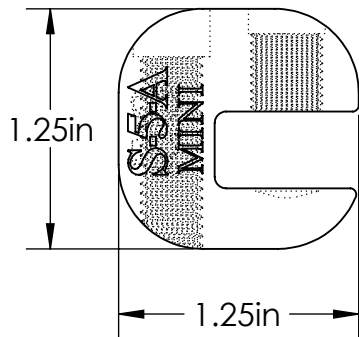

FOR STANDING SEAM SPECIFIC MECHANICAL LOAD TEST INFORMATION AND CLAMP INSTALLATION INFORMATION PLEASE VISIT: WWW.S-5.COM

MATERIAL: 6061 T6 Al	 S-5! The Right Way! METAL ROOF INNOVATIONS, LTD. 8655 TABLE BUTTE RD COLORADO SPRINGS, CO 80908 719-495-0518 719-495-0045(FAX)		
EST ASSEMBLY WEIGHT: 0.165 lbs	TITLE S-5-A Mini		
SUPPLIED HARDWARE: M8-1.25 x 16 mm Bolt 3/8-24 x .800" Setscrew	DRAWING NO. A01-B-2-A	DRAWN BY Paul Leitch	DATE 09/22/2017
SCALE: 1:1 EST. WEIGHT: Clamp: 0.113 lbs Setscrew: 0.0170 lbs Bolt: 0.0345 lbs			

General Notes:

1. S-5-A Mini Clamp
2. M8-1.25 Stainless Steel Hex Flange Bolt (13mm Socket)
3. 3/8-24 Stainless Steel Round Point Setscrew (3/16 Hex Drive)
4. Example roof

S-5® PRODUCTS ARE PROTECTED BY MULTIPLE U.S. AND FOREIGN PATENTS.
VISIT OUR WEBSITE AT WWW.S-5.COM FOR COMPLETE INFORMATION ON PATENTS AND TRADEMARKS.