


manufacturer test report

testing according to DIN EN 50164-1 (VDE 0185 part 201)

Saddle Clamp Part No. 365 250

material: aluminium/stainless steel

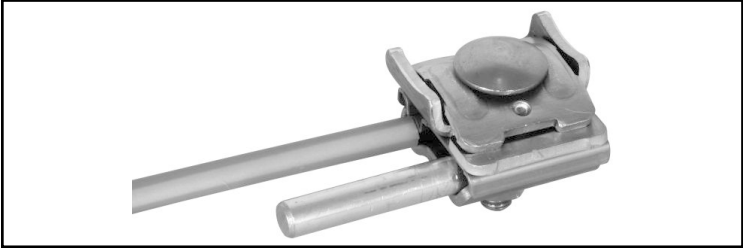

non-binding figure

application: overground

conductor connected	test result
1st conductor : round wire 10 aluminium	N
2nd conductor : structure aluminium	

caption

withstand lightning current class H 100 kA (10/350 µs)
withstand lightning current class N 50 kA (10/350 µs)
Detailed data of testing conditions can be requested on demand.