


(365 250)



Figure without obligation

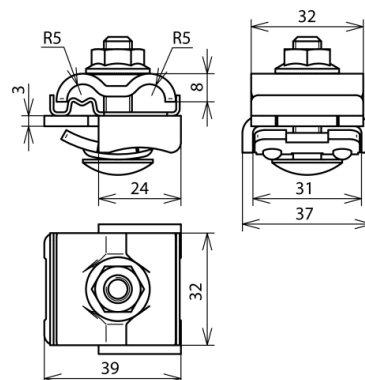

Saddle clamp for integrating the mounting systems e.g. of PV systems into the functional equipotential bonding/functional earthing (optionally black conductor) and lightning protection equipotential bonding according to IEC/EN 62305-3.

Conductors of different materials (Cu, Al, St/tZn and StSt) may be connected e.g. to aluminium mounting systems without the risk of contact corrosion due to a contact plate (intermediate element) made of StSt.

Easy and quick interconnection of profiles is possible e.g. by means of feed-through wiring due to the double cleat design.

Part No.	365 250
Clamping range of saddle	0.7-8 mm
Material of clamping bracket	Al
Material thickness	3 mm
Clamping range Rd	8-10 mm
Connection (solid/stranded)	4-50 mm ²
Material of double cleat	StSt
Screw	⬆ M8x35 mm
Self-locking nut	width across flats 13 mm
Material of screw/nut	StSt
Connecting direction	longitudinal/cross
Standard	EN 50164-1
Weight	83 g
Customs tariff number	85389099
GTIN	4013364148307
PU	50 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.