



A Canadian Solar subsidiary

T4-PC-1 CONNECTOR

PRODUCT OVERVIEW

T4 connectors use high quality materials that guarantee longterm reliability. Lower contact resistance and higher current transfer capability ensure high product efficiency. T4 connectors have IP68 water-proof rating and can be used in a wide operating temperature range from -40 °C to 90 °C.

CERTIFICATIONS

UL 6703: CSA IEC 62852: TÜV-SÜD

RoHS, REACH, NEC, PAHS and Halogen-free compliant (no locking sleeve required)







ELECTRICAL DATA

Rated Voltage	IEC 1500 VDC & UL1500 VDC
Rated Current	48A (4 mm²) / 32A (12 AWG) 54A (6 mm²) / 32A (10 AWG)
Contact Resistance	≤ 0.25 mΩ
Pollution Degree	Class II
Protection Class	Class II
Protection Degree	IP68 (when mated)
Fire Resistance	UL 94-V0
Temperature Range	- 40 °C ∼ + 90 °C
Rated Impulse Voltage	16 kV





Male connector (-)





Female connector (+)




MECHANICAL DATA

IEC: 4 mm ² / 6mm ² ; UL:10AWG/12AWG
,
Φ 4.0 mm
Copper, Tin-plated
Crimping
Locking type

TLIAN (CHANGSHU) CO., LTD.

ENGINEERING DRAWING (mm)

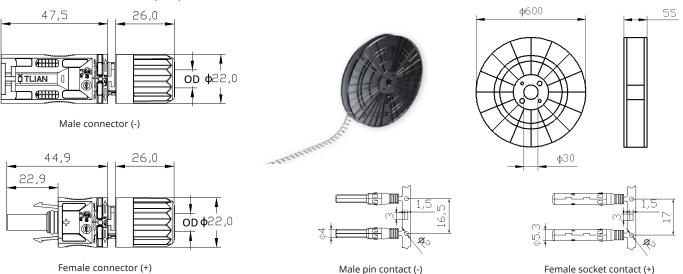

T4-PC-1 ORDER INFORMATION

Product	Ф Cable OD	Conductor Cross Section	Packing Units
T4-PC-1	4.3 - 6.6 mm	4 mm² / 6 mm²	100 pairs or 500 pairs
	6.7 - 7.5 mm (Large)	12 AWG / 10 AWG	

ACCESSORIES ORDER INFORMATION

Product	Description	Packing Units
T4-DT	T4 Disconnect Tool	80 units or 400 units
T4-EC	T4 Connector End Cap	1000 or 5000 pairs
T4-MPC	T4 Male Pin Contact (-) In a Roll	4 Rolls (10000 units)
T4-FSC	T4 Female Socket Contact (+) In a Roll	4 Rolls (10000 units)
T4-MFC	T4 Male and Female Contact (-)/(+)	2000 or 10000 pairs
T4-TOOLKIT	T4 Field Installation Toolkit	1 unit

T4-TOOLKIT COMPONENTS

Wire stripper tool	1 piece
Wire crimping tool	1 piece
Cutting pliers	1 piece
T4 disconnect tool	2 pieces
Metal disconnect tool	2 pieces
Crimping tool accessory	1 piece
T4-PC-1 Spare connectors	2 pairs
Installation manual	1 сору

T4-TOOLKIT SIZE

Size	360×345×75 mm (14.2×13.6×2.9 in)
Weight	3kg (6.6 lbs)

The specifications and features described in this datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, Tlian reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

The connector must be isolated and disconnected from the power supply during the assembly or disassembly process. Do not disconnect under load. The use of a PV cable is recommended. Avoid any grease or oils contacting the body of the T4 PV connector. Please read the safety and installation instructions before using the connector.



CAUTION:

1. The exposure to or direct contact with chemicals or oils of T4 products may cause corrosion, degradation of performance, or cracking of the product, thus such exposure or direct contact should be strictly prohibited during the process of product manufacturing, transportation, installation and application.

The chemicals that may come into contact with or be used in the process above. It is the user's responsibility to validate that such chemical will not affect the performance

- of T4 products.

 2. Interconnection of different connector models/brands with T4 is not allowed.
- Recycling and all other types of comparable disassembly of the above mentioned pro-ducts have to be performed by a qualified waste management company, in compliance with national and local waste management regulations.