

DC Protection Box DCB-NF-6I-1000V-I16A-6O

For use with high voltage DC strings up to 1000Vdc




- IP65
- Glass Reinforced Polyester Base
- Polycarbonate Lid
- RAL 7032
- Impact Resistant
- Double Insulated – Class II
- Ambient Temperature range:
-25°C / +40°C
- Max Operating Voltage:
1000V AC / 1500V DC
- External Earth Stud

- This product is designed to provide individual string protection and external isolation for Solar PV strings.
- The enclosure is fitted with Original Staubli MC-4 Solar Connectors for ease of connection of input strings.
- The enclosure provides excellent protection against the elements and is UV stabilized
- Pre-wired internal switchgear improves the system installation time.
- Connectors are clearly marked to streamline installation

6 IN / 6 OUT DC PROTECTION BOX

Technical Data

Number of Inputs	6 string input
Number of Outputs	6 string output
Surge Protection Device	None
Max current	16A
Max String Voltage -Voc	1000Vdc
String Connection	Staubli MC-4 set
IP Rating	IP 65
Enclosure Material	Glass Reinforced Polyester
Enclosure Color	RAL 7032
UV Stabilized	Yes
Additional Heat Dissipation	M12 ventilation plug
NRCS Regulatory Approval	Yes – components certified under NRCS
Enclosure size	470 x 310 x 148mm

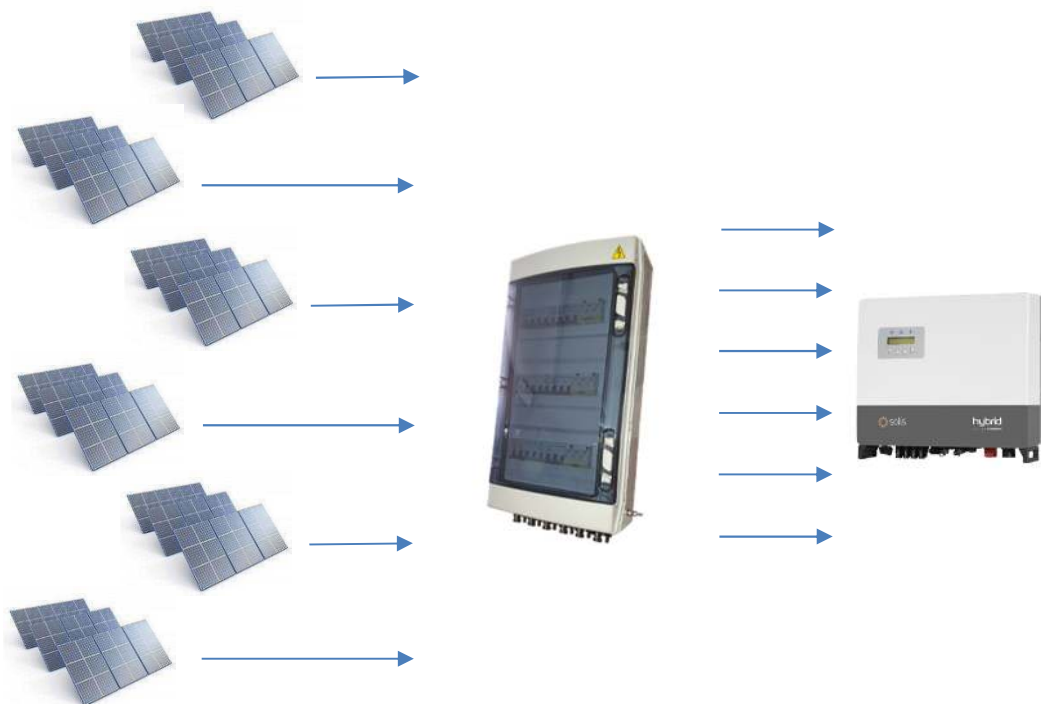

SegenSolar
(Pty) Ltd

245 Masjien Street
Strijdom Park, Randburg
www.segensolar.co.za