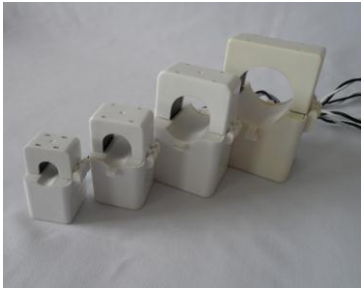
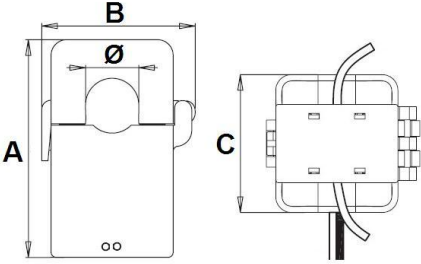
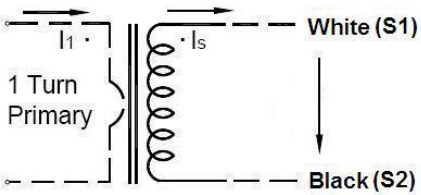


Type Selection ( Output: 1A/5A ) **SCTK681B Miniature Split Core Current Transformer**

Part Number	Input/Output (A)	Burden(VA)/Class				Product Description															
		0.2	0.5	1.0	3.0																
SCTK681B-024	50/1	---	---	---	1.5																
	100/1	---	---	1.5	2.5																
	150/1	---	---	1.5	2.5																
	200/1	---	1.5	2.5	3.75																
	250/1	---	1.5	2.5	3.75																
	300/1	---	1.5	2.5	5																
	400/1	---	1.5	2.5	7.5																
SCTK681B-035	50/1	---	---	---	1.5																
	150/1	---	---	1.5	2.5																
	250/1	---	1.5	2.5	3.75																
	300/1	---	1.5	2.5	5																
	400/1	---	1.5	2.5	5																
	500/1	---	2.5	3.75	7.5																
	600/1	1.5	2.5	5	7.5																
	100/5	---	---	1.5	3.0	<p><b>Dimensions(mm/inch)</b></p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ø</th> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td rowspan="4"><b>681B-024</b></td> <td>24.0 (0.95)</td> <td>70.0 (2.76)</td> <td>50.5 (1.99)</td> <td>38.0 (1.50)</td> </tr> <tr> <td rowspan="4"><b>681B-035</b></td> <td>35.0 (1.38)</td> <td>83.0 (3.27)</td> <td>65.0 (2.56)</td> <td>40.0 (1.57)</td> </tr> </tbody> </table>	Type	Ø	A	B	C	<b>681B-024</b>	24.0 (0.95)	70.0 (2.76)	50.5 (1.99)	38.0 (1.50)	<b>681B-035</b>	35.0 (1.38)	83.0 (3.27)	65.0 (2.56)	40.0 (1.57)
	Type	Ø	A	B	C																
	<b>681B-024</b>	24.0 (0.95)	70.0 (2.76)	50.5 (1.99)	38.0 (1.50)																
		<b>681B-035</b>	35.0 (1.38)	83.0 (3.27)	65.0 (2.56)		40.0 (1.57)														
			200/5	---	1.5		2.5	3.75													
			250/5	---	1.5		2.5	3.75													
	300/5		---	1.5	2.5		5														
400/5	---	1.5	2.5	5																	
500/5	---	2.5	3.75	7.5																	
600/5	---	2.5	5	7.5																	
<p><b>Circuit connection diagram</b></p> 																					
<p><b>NOTE:</b></p> <ul style="list-style-type: none"> <li>● Rated Primary current :0-600Aac</li> <li>● Rated Secondary current: 1A/5A</li> <li>● Rated load: 1.5,2.5, 3.75, 5.0,7.5VA</li> <li>● Accuracy: 0.2, 0.5, 1.0, 3.0 Class</li> <li>● Output Connection:UL1015 20AWG Wire 2.5m</li> <li>● Forbidden to open the second, otherwise, easy to produce high voltage</li> </ul>																					